




Huawei Mediapad t1 7.0" Touchscreen Replacement

Follow the guide to replace touchscreen glass

Written By: Smilzo

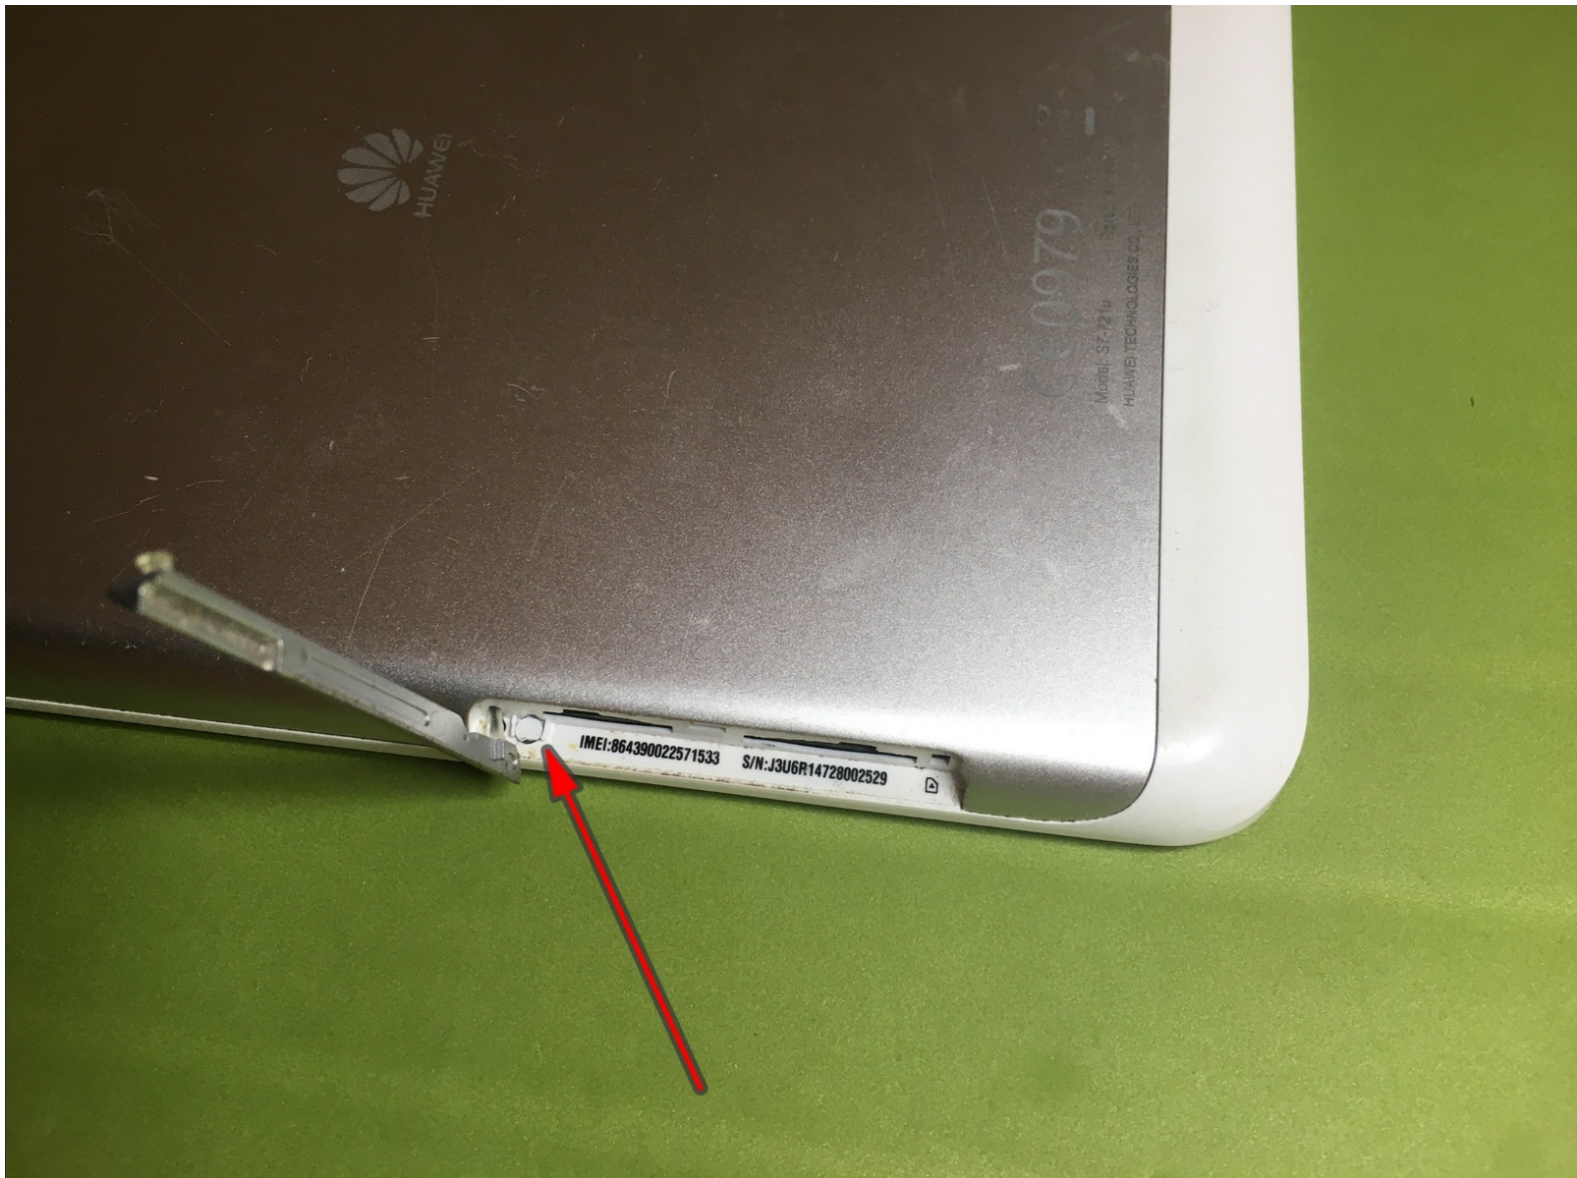

INTRODUCTION



Follow the guide to replace touchscreen glass

Step 1 — Touch Screen




- Open the SD slot and remove the screw hidden under the sticker.

Step 2

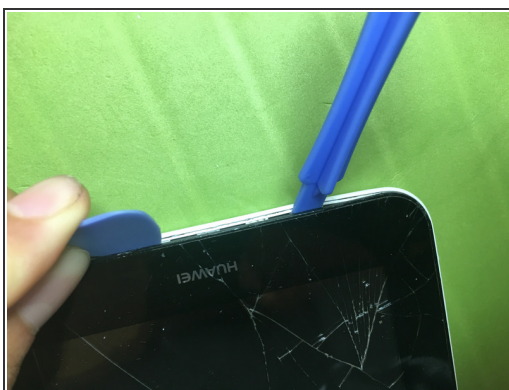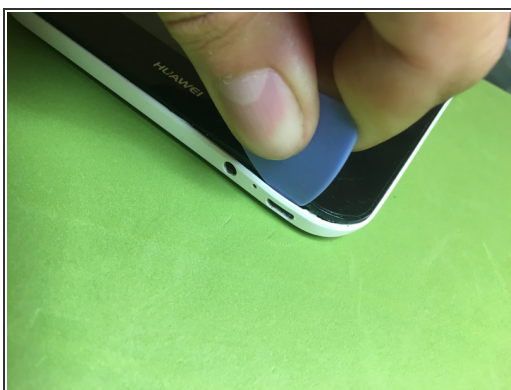

- Use an opening pick to disengage the clips securing the back cover.

Step 3

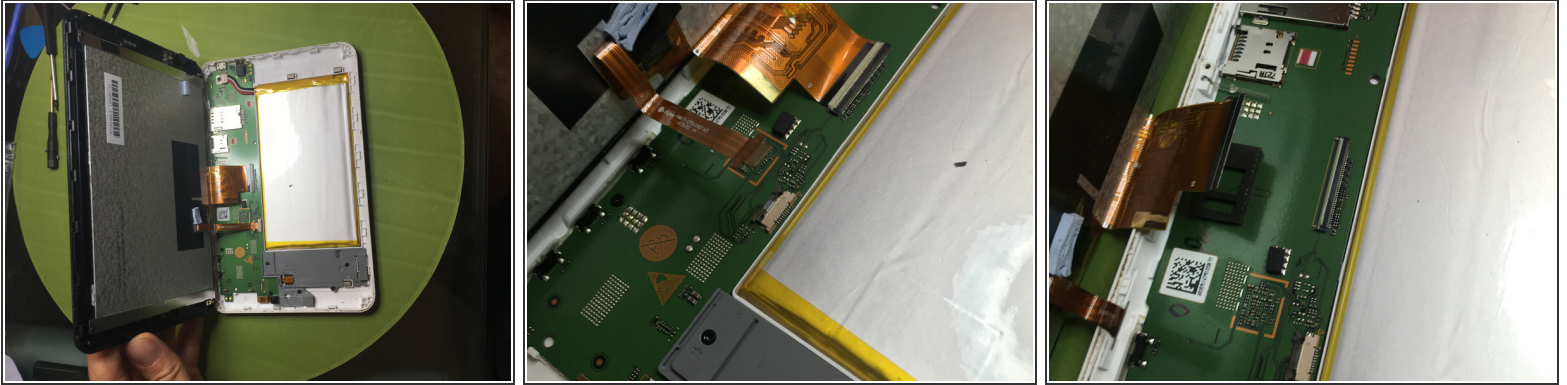

- Carefully swing up the display assembly, still connected by the touchscreen and display ribbon cables.
- Disconnect the touchscreen connector.
- Disconnect the display connector.

Step 4



- Remove the 6 screws that secure the 2 metal stripes holding the display.
- Remove the display.

Step 5



- Apply heat on the panel edges. Use an opening pick to separate the glass panel from the plastic frame.

Step 6



- Remove any remaining adhesive and piece of glass to allow adhesive and glass panel replacement.

To assemble the device, follow these instructions in reverse order.

This document was last generated on 2017-07-09 09:10:48 PM.